




# Conti® VX Advance

# CONTI® V FO PIONEER becomes Conti® VX Advance

- The CONTI®VX Advance replaces the established CONTI®V FO PIONEER. It has precisely the same properties and the same performance as before. Only difference is a new color and new branding. The CONTI®VX Advance is changing from blue to black color with yellow and white branding.
- In the new, globally standardized logic. Conti® V stands for a V-belt from Continental. The X stands for Raw Edge. The performance levels are indicated transparently as Standard, Advance or Supreme. This gives rise to the new name: Conti® VX Advance.



**CONTI® V FO PIONEER**

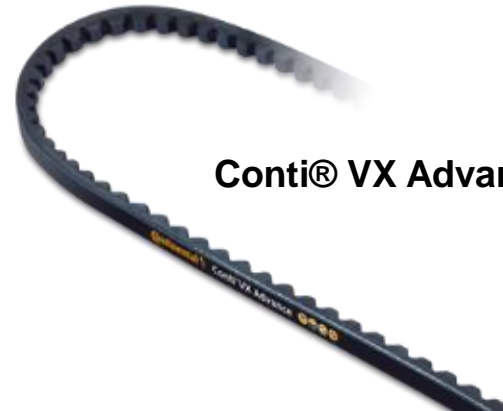

**Conti® VX Advance**

# New Naming Structure & Branding

## From blue to black

OLD  
EMEA/APAC



NEW



# Characteristics of new belt

Look first and foremost for the change of color. The old belt is blue, and the new belt is black with a yellow Continental logo and round information icons for quick identification. The profile and length are branded in white.



## New Icons for quick identification



**Matchmaker –  
Set tolerance**



**Antistatic  
ISO 1813**



**Service free**



**Resistance against low &  
high temperatures**

# New article number for Jens S.

**NEW** article number - The VX Advance belts will change from P to A

Old = XPB2500P

New = XPB2500A

## **Dimension / Description**


**XPB** = XPB-profile

**2500** = belt length in mm

**A** = Advance-category

# Product properties

- Can be used in larger installations with greater center distances
- Improved durability thanks to abrasion-resistant compound
- Length range up to 6,85 m (all profiles)
- Temperature resistant from -40°C to +130°C
- Maintenance-free
- Matched length as standard thanks to Matchmaker system
- Antistatic according to ISO 1813
- Conditionally oil resistant
- Low PAHs

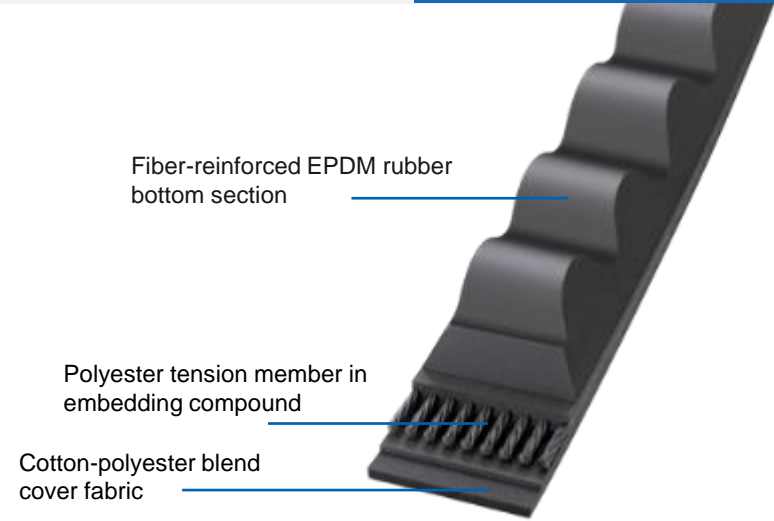

Profile	Length range
XPZ/3VX	512 - 3550 mm
XPA	590 – 4000 mm
XPB/5VX	1000 – 5000 mm
XPC	1900 – 5000 mm
8VX	Available on request

**Easy • Safe • Efficient**