



CONTI[®] SYNCHROTWIN

Double-sided timing belts for compact drives with reverse rotation

Properties:

- Temperature range from -20 °C to +100 °C, depending on application
- Conditionally resistant to oil
- Ozone-resistant
- Suitable for tropical climates
- Resistant to aging
- Suitable for reverse flexing/reverse tensioning idlers
- Maintenance-free

Belt structure:

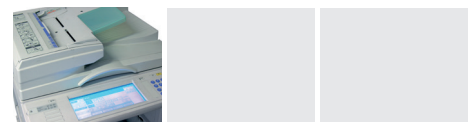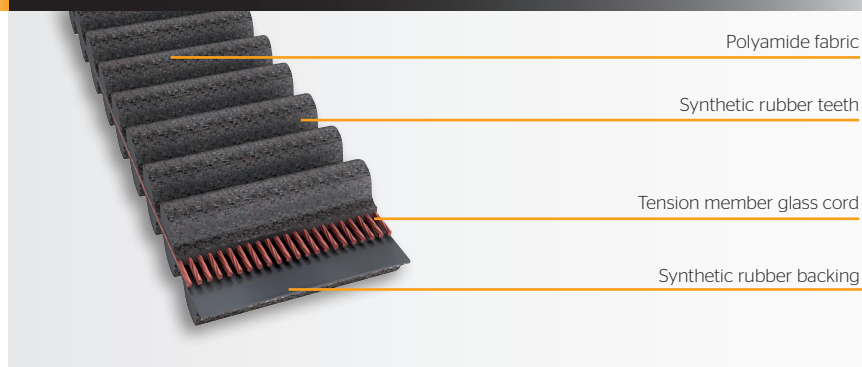

DHTD

Profile	Length range L _p (mm)
DHTD D5M	565 - 2000
DHTD D8M	600 - 2600
DHTD D14M	966 - 2450

DSTD

Profile	Length range L _p (mm)
DSTD DS8M	600 - 2392

DH

Profile	Length range L _p (1/10 inch / mm)
DH	270 - 750 / 685,8 - 1905

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2015 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en