


SilentSync is a self tracking timing belt made for quiet and reduced vibration operation and is also an excellent choice for horizontal drives. The belt is available in HNBR rubber with cord made in aramid. Profiles available in stock are 8M and 14M.




Product Properties

- Temperature range, depending on application, from -30 °C to +130 °C
- Very low-noise
- Antistatic in accordance with ISO 9563
- Limited oil resistance
- Suitable for tropical climates
- Ozone-resistant
- Aging-resistant
- Maintenance-free
- Dust-proof

Description		H.O.T 8M	HOT 14M
Belt widths available	mm	16 (Y) 32 (W) 64 (P)	35 (B) 52,5 (G) 70 (O) 105 (R)
Color code		Y=Yellow W=White P=Purple	B=Blue G=Green O=Orange R=Red
Pitch p	mm	8	14
Belt thickness, h	mm	5,5	9,1
Tooth height, ht	mm	3,01	5,30

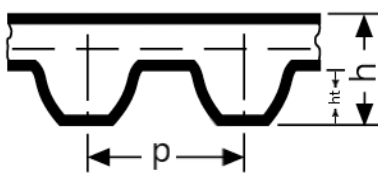

Item no. example:

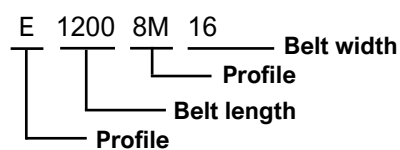

- Material: HNBR
- Cord: Aramid
- Temperature range: -30° to +130°
- Antistatic acc. to ISO 9563

8M	
Pitch length Lp, mm	Number of teeth Z
640	80
720	90
800	100
896	112
1000	125
1120	140
1200	150
1280	160
1440	180
1600	200
1792	224
2000	250
2240	288
2400	300

14M	
Pitch length Lp, mm	Number of teeth Z
994	71
1120	80
1190	85
1260	90
1400	100
1568	112
1750	125
1960	140
2100	150
2240	160
2380	170
2520	180
2660	190
2800	200
3136	224
3304	236
3500	250
3920	280